





SPECIFICATIONS
 Current Rating: 1.0 AMP
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: AC/DC 500V
 Insulator Resistance: 1000 MΩ Min
 Operating Temp.: -40°C ~ +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn over Ni
 Insulator Material: PA6T Black+30%GF UL94V-0 BK

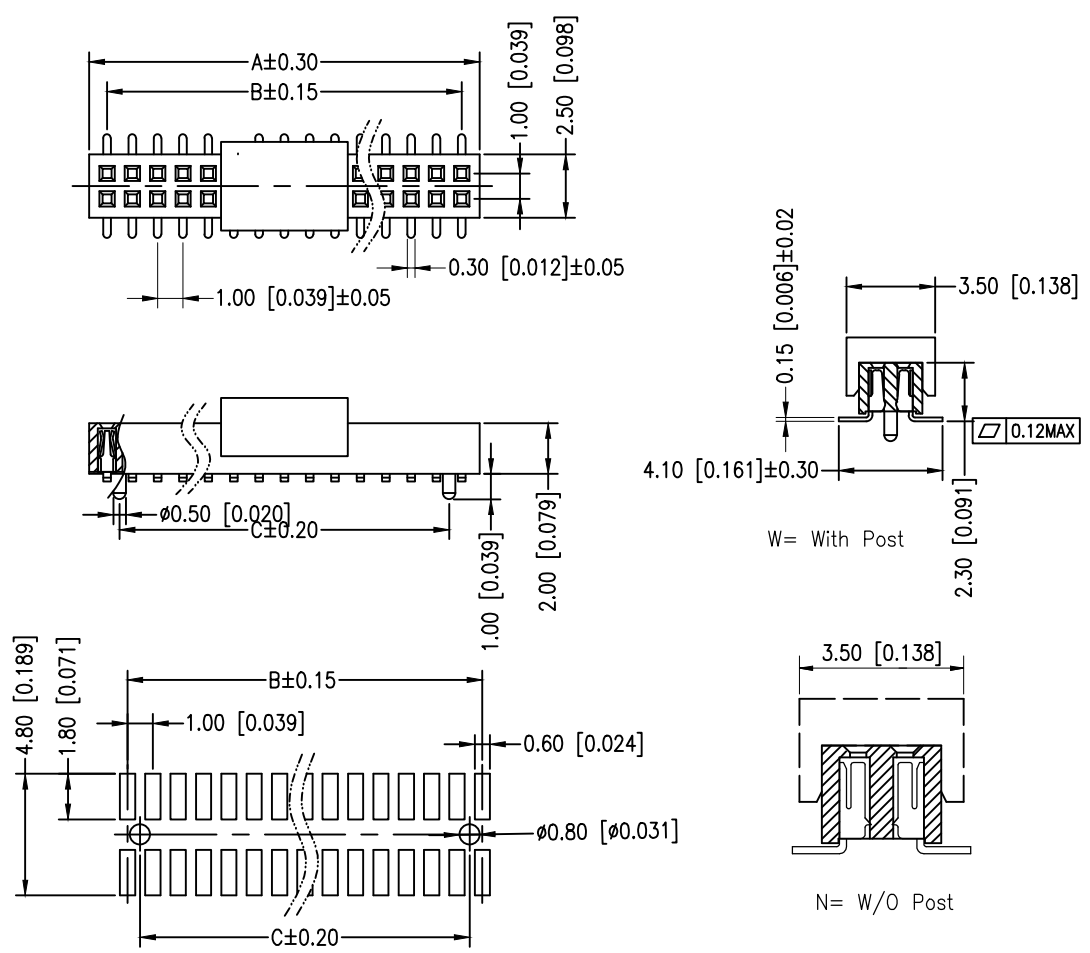

PIN NO	DIM A	DIM B	DIM C	PIN NO	DIM A	DIM B	DIM C
2*2PIN	2.40	1.00		2*27PIN	27.40	26.00	25.00
2*3PIN	3.40	2.00	1.00	2*28PIN	28.40	27.00	26.00
2*4PIN	4.40	3.00	2.00	2*29PIN	29.40	28.00	27.00
2*5PIN	5.40	4.00	3.00	2*30PIN	30.40	29.00	28.00
2*6PIN	6.40	5.00	4.00	2*31PIN	31.40	30.00	29.00
2*7PIN	7.40	6.00	5.00	2*32PIN	32.40	31.00	30.00
2*8PIN	8.40	7.00	6.00	2*33PIN	33.40	32.00	31.00
2*9PIN	9.40	8.00	7.00	2*34PIN	34.40	33.00	32.00
2*10PIN	10.40	9.00	8.00	2*35PIN	35.40	34.00	33.00
2*11PIN	11.40	10.00	9.00	2*36PIN	36.40	35.00	34.00
2*12PIN	12.40	11.00	10.00	2*37PIN	37.40	36.00	35.00
2*13PIN	13.40	12.00	11.00	2*38PIN	38.40	37.00	36.00
2*14PIN	14.40	13.00	12.00	2*39PIN	39.40	38.00	37.00
2*15PIN	15.40	14.00	13.00	2*40PIN	40.40	39.00	38.00
2*16PIN	16.40	15.00	14.00	2*41PIN	41.40	40.00	39.00
2*17PIN	17.40	16.00	15.00	2*42PIN	42.40	41.00	40.00
2*18PIN	18.40	17.00	16.00	2*43PIN	43.40	42.00	41.00
2*19PIN	19.40	18.00	17.00	2*44PIN	44.40	43.00	42.00
2*20PIN	20.40	19.00	18.00	2*45PIN	45.40	44.00	43.00
2*21PIN	21.40	20.00	19.00	2*46PIN	46.40	45.00	44.00
2*22PIN	22.40	21.00	20.00	2*47PIN	47.40	46.00	45.00
2*23PIN	23.40	22.00	21.00	2*48PIN	48.40	47.00	46.00
2*24PIN	24.40	23.00	22.00	2*49PIN	49.40	48.00	47.00
2*25PIN	25.40	24.00	23.00	2*50PIN	50.40	49.00	48.00
2*26PIN	26.40	25.00	24.00				

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Any size and shape can be customized.
 Contact sales team for more information.



PRODUCT NAME	DIM	TOL	DWG NO.	DRAW	Wu	PART NO	CUST
1.0 MM FEMALE HEADER SERIES	X. X	±0.4	P. W	CHECK	Tomy	UNIT	DATE
	X. XX	±0.25	MATER PA6T、BRASS	APPR	Allan	MM[INCH]	XXXX. XX. XX
	ANGLE	±3°	REV. A0	东莞市同盈电子有限公司 DONGGUAN WIN-WIN ELECTRONIC Co.,Ltd.			