

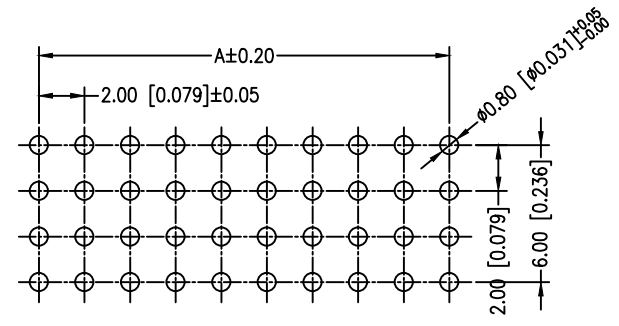
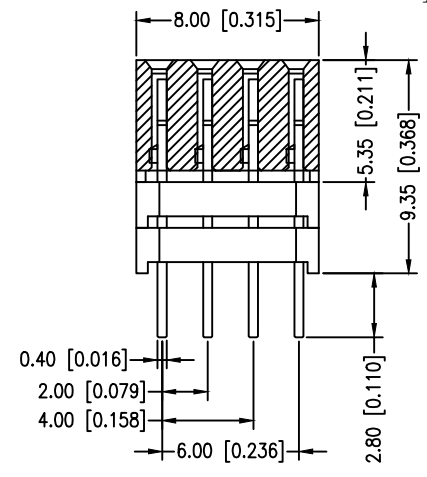


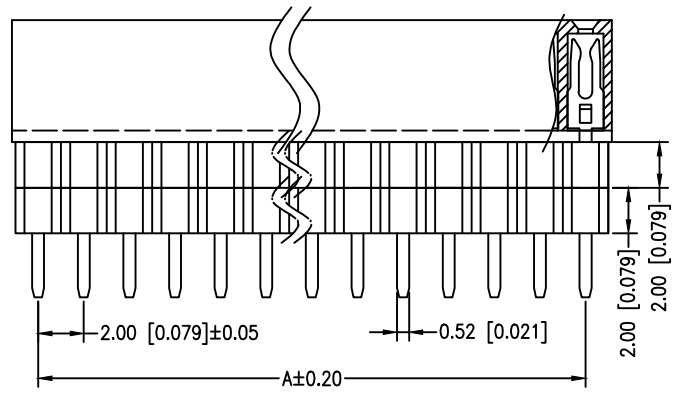

SPECIFICATIONS


Current Rating: 2.0 AMP
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: AC/DC 500V
 Insulator Resistance: 1000 MΩ Min
 Operating Temp.: -40°C ~ +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn over Ni
 Insulator Material: PA6T Black+30%GF UL94V-0 BK

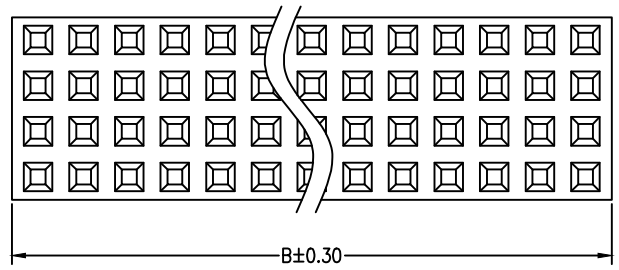

Recommended P.C.B Layout

PIN Number	Dimension(mm)		PIN Number	Dimension(mm)	
	A	B		A	B
4X2P	2.00	4.30	4X22P	42.00	44.30
4X3P	4.00	6.30	4X23P	44.00	46.30
4X4P	6.00	8.30	4X24P	46.00	48.30
4X5P	8.00	10.30	4X25P	48.00	50.30
4X6P	10.00	12.30	4X26P	50.00	52.30
4X7P	12.00	14.30	4X27P	52.00	54.30
4X8P	14.00	16.30	4X28P	54.00	56.30
4X9P	16.00	18.30	4X29P	56.00	58.30
4X10P	18.00	20.30	4X30P	58.00	60.30
4X11P	20.00	22.30	4X31P	60.00	62.30
4X12P	22.00	24.30	4X32P	62.00	64.30
4X13P	24.00	26.30	4X33P	64.00	66.30
4X14P	26.00	28.30	4X34P	66.00	68.30
4X15P	28.00	30.30	4X35P	68.00	70.30
4X16P	30.00	32.30	4X36P	70.00	72.30
4X17P	32.00	34.30	4X37P	72.00	74.30
4X18P	34.00	36.30	4X38P	74.00	76.30
4X19P	36.00	38.30	4X39P	76.00	78.30
4X20P	38.00	40.30	4X40P	78.00	80.30
4X21P	40.00	42.30			

Any size and shape can be customized.
 Contact sales team for more information.



PRODUCT NAME	DIM	TOL	DWG NO.	DRAW	Wu	PART NO	CUST
2.0 MM FEMALE HEADER SERIES	X. X	±0.4	P. W	CHECK	Tomy	UNIT	DATE
	X. XX	±0.25	MATER	PA6T、BRASS	Allan	MM[INCH]	XXXX. XX. XX
	ANGLE	±3°	REV.	A0		东莞市同盈电子有限公司 DONGGUAN WIN-WIN ELECTRONIC Co.,Ltd.	