



SPECIFICATIONS


Current Rating:	7.0 AMP
Contact Resistance:	20mΩ Max.
Withstand Voltage:	AC/DC 1000V
Insulator Resistance:	1000 MΩ Min
Operating Temp.:	-40℃~+105℃
Contact Material:	Brass
Contact Plating:	Au or Sn over Ni
Insulator Material:	PA6T Black+30%GF UL94V-0 BK

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLFRANCF+0.05)

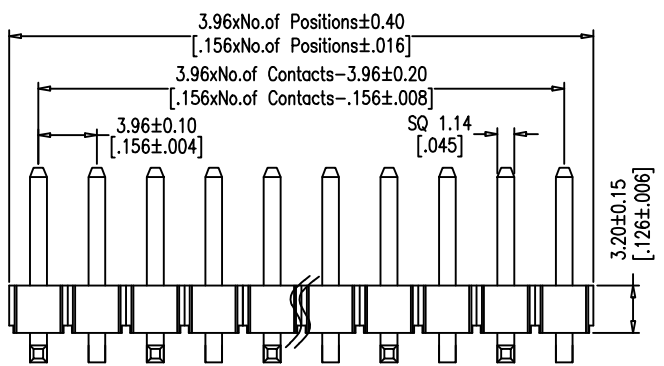

PIN Number	Dimension(mm)	
	A	B
1*1P	3.96
1*2P	3.96	7.92
1*3P	7.92	11.88
1*4P	11.88	15.84
1*5P	15.84	19.80
1*6P	19.80	23.76
1*7P	23.76	27.72
1*8P	27.72	31.68
1*9P	31.68	35.64
1*10P	35.64	39.60
1*11P	39.60	43.56
1*12P	43.56	47.52
1*13P	47.52	51.48
1*14P	51.48	55.44
1*15P	55.44	59.40
1*16P	59.40	63.36
1*17P	63.36	67.32
1*18P	67.32	71.28
1*19P	71.28	75.24
1*20P	75.24	79.20

Any size and shape can be customized.
Contact sales team for more information.



PRODUCT NAME		DIM	TOL	DWG NO.	DRAW	Wu	PART NO	CUST	
3.96 MM SINGLE ROW PIN HEADER SERIES SMT		X. X	±0.4	P. W	CHECK	Tomy	UNIT	MM[INCH]	DATE XXXX.XX.XX
		X. XX	±0.25	MATER PA6T、BRASS	APPR	Allan	东莞市同盈电子有限公司 DONGGUAN WIN-WIN ELECTRONIC Co.,Ltd.		
		ANGLE	±3°	REV. A0					