





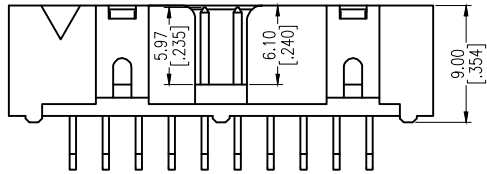


SPECIFICATIONS


Current Rating: 3Amp
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C~105°C
 Contact Material: Brass
 Contact Plating: Au or Sn over Ni
 Insulation Material: PA9T+30GF(UL94V-0)

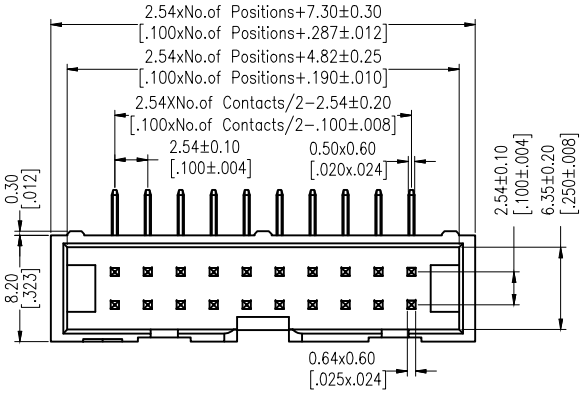

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

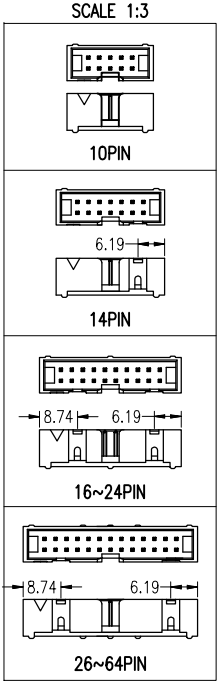

Any size and shape can be customized.
 Contact sales team for more information.



| | | | | | | | |
|--------------------------|-------|-------|---------|------------|-------|----------|------------|
| PRODUCT NAME | DIM | TOL | DWG NO. | DRAW | Wu | PART NO | CUST |
| 2.54MM BOX HEADER SERIES | X.X | ±0.4 | P.W | CHECK | Tomy | UNIT | DATE |
| | X.XX | ±0.25 | MATER | PA9T、BRASS | Allan | MM[INCH] | XXXX.XX.XX |
| | ANGLE | ±3° | REV. | A0 | | | |

win 东莞市同盈电子有限公司
 DONGGUAN WIN-WIN ELECTRONIC Co., Ltd.