


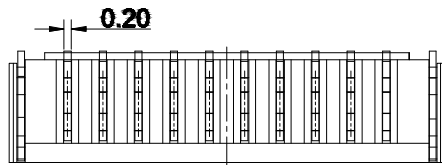
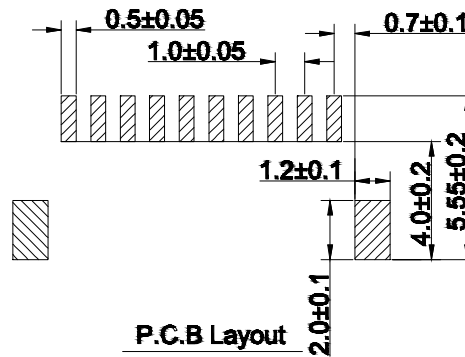
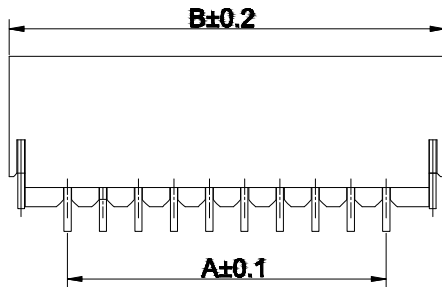


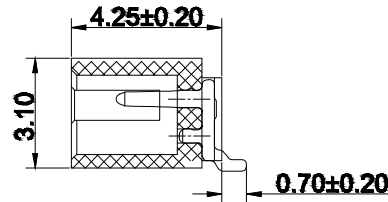


SPEC:
 Rated Voltage:50V AC/DC
 Rated Current:1A
 Withstanding Voltage:500V AC/Minute
 Contact Resistance:20mΩ Max
 Insulation Resistance:100MΩ Min
 Temperature Range:-25°C to +85°C
 Material:PA9T UL94V0

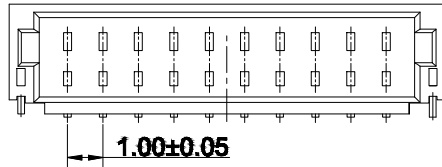

Circuits	Dimension	
	A	B
02	1.00	4.50
03	2.00	5.50
04	3.00	6.50
05	4.00	7.50
06	5.00	8.50
07	6.00	9.50
08	7.00	10.50
09	8.00	11.50
10	9.00	12.50
11	10.00	13.50
12	11.00	14.50
13	12.00	15.50
14	13.00	16.50
15	14.00	17.50
16	15.00	18.50
17	16.00	19.50
18	17.00	20.50
19	18.00	21.50
20	19.00	22.50

Any size and shape can be customized.
 Contact sales team for more information.



PRODUCT NAME	DIM	TOL	DWG NO.	DRAW	Wu	PART NO	CUST
1.0mm JST Wire to Board SMT Right-angle Wafer	X.X	±0.3	P.W	CHECK	Tomy	UNIT	DATE
	X.XX	±0.2	MATER PA9T UL94V0	APPR	Allan	MM[INCH]	XXXX.XX.XX
	ANGLE	±3°	REV. A0	东莞市同盈电子有限公司 DONGGUAN WIN-WIN ELECTRONIC Co., Ltd.			