


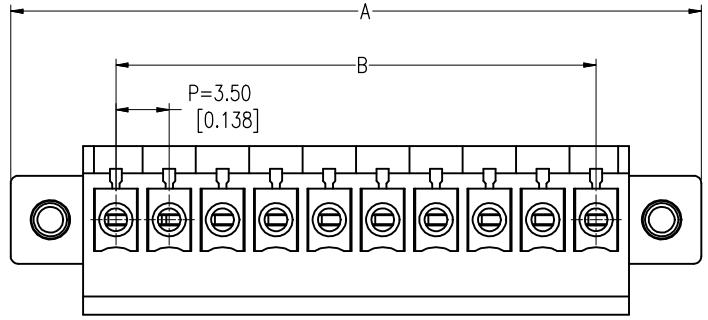
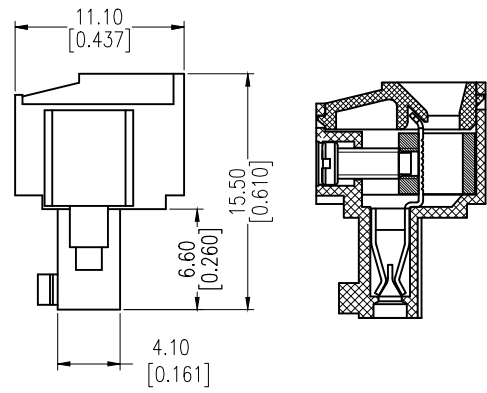
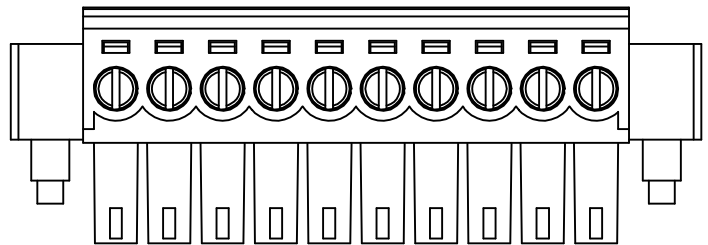


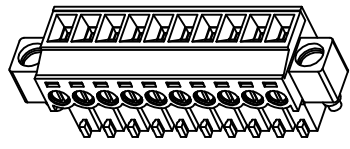


Specification  
 Current Rating: 8A  
 Voltage Rating: 300V  
 Contact Resistance: 8 Milliohm Max  
 Withstand Voltage: 2000V AC/DC  
 Insulation Resistance: 1000 Megohm Min  
 Operation Temperature: -40°C ~ 105°C  
 Housing Material: PA66+30%GF (UL94V-0)  
 Contact Material: Brass  
 Terminal Plating: Tin over Ni

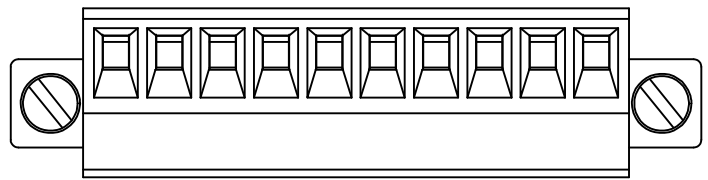

Any size and shape can be customized.  
 Contact sales team for more information.



PRODUCT NAME	DIM	TOL	DWG NO.	DRAW	Wu	PART NO	CUST
3.50mm Pluggable Terminal Blocks	X.X	±0.4	P.W	CHECK	Tomy	UNIT	DATE
	X.XX	±0.25	MATER	PPS, BRASS	Allan	MM[INCH]	XXXX.XX.XX
	ANGLE	±3°	REV.	A0	 东莞市同盈电子有限公司 DONGGUAN WIN-WIN ELECTRONIC Co., Ltd.		